

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015311 A2

(51) International Patent Classification⁷: **G03F 7/00**

(21) International Application Number:
PCT/JP2004/011648

(22) International Filing Date: 6 August 2004 (06.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-290164 8 August 2003 (08.08.2003) JP

(71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA** [JP/JP]; 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MIZUTANI, Nat-suhlko** [JP/JP]; 1-2-8-304, Sendagi, Bunkyo-ku, Tokyo 113-0022 (JP).

(74) Agent: **YAMADA, Ryuichi**; Toko International Patent Office, Hasegawa Bldg. 4F, 7-7, Toranomom 3-chome, Minato-ku, Tokyo 105-0001 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **NEAR-FIELD EXPOSURE METHOD AND APPARATUS, NEAR-FIELD EXPOSURE MASK, AND DEVICE MANUFACTURING METHOD**

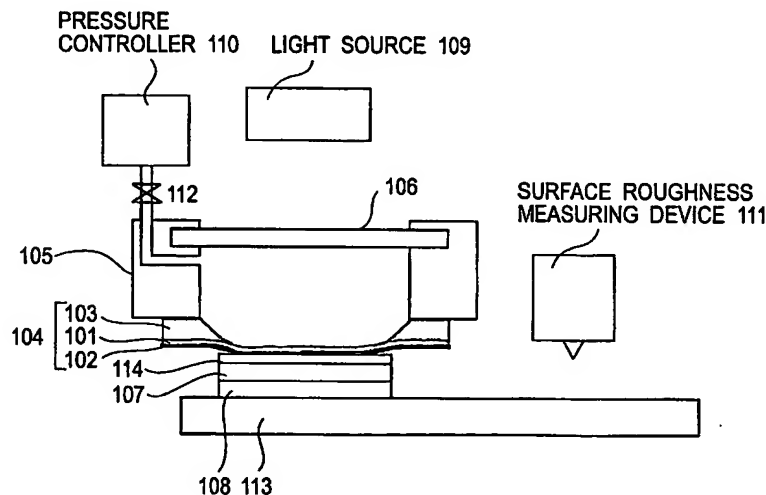

(57) Abstract: Disclosed is a near-field exposure method and apparatus, a near-field exposure mask, and a device manufacturing method, wherein exposure is carried out on the basis of near field light. Specifically, the near-field exposure method disclosed is arranged so that a pressure difference is applied to between a front face and a rear face of an elastically deformable exposure mask to cause deformation of the exposure mask in accordance with a substrate to be exposed and to cause the exposure mask surface to follow a surface irregularity state of the substrate such that these surfaces are closely contacted to each other, for exposure based on near field light. The pressure difference applied to between the front and rear faces of the exposure mask is set at a predetermined pressure difference corresponding to surface roughness of the substrate to be exposed.

Rec'd PCT/PTO 01 APR 2005

DESCRIPTION

NEAR-FIELD EXPOSURE METHOD AND APPARATUS,
NEAR-FIELD EXPOSURE MASK, AND
5 DEVICE MANUFACTURING METHOD

[TECHNICAL FIELD]

This invention relates to a near-field exposure method, a near-field exposure apparatus,
10 a near-field exposure mask, and a device manufacturing method.

[PRIOR ART]

Increasing capacity of a semiconductor
15 memory and increasing speed and density of a CPU processor have inevitably necessitated further improvements in fineness of microprocessing through optical lithography. Generally, the limit of microprocessing with an optical lithographic
20 apparatus is of an order of the wavelength of a light source used. Thus, the wavelength of a light source used in optical lithographic apparatuses has been shortened more and more, by using a near ultraviolet laser, for example, and
25 microprocessing of 0.1 μm order is enabled.

While the fineness is being improved in the optical lithography, in order to assure

microprocessing of 0.1 μm or narrower, there still remain many unsolved problems such as further wavelength shortening of a light source, development of lenses usable in such wavelength region, and the like.

As one method for solving such problem, U.S. Patent No. 6,171,730 proposes a near-field exposure method for performing exposure on the basis of near field light. The method and apparatus disclosed in the aforementioned U.S. patent is very useful and it makes a large contribution to the technical field to which the present invention pertains. In this near-field exposure method, an exposure mask being elastically deformable is used, and a pressure difference is applied to between the front face and the rear face of the exposure mask to cause deformation thereof with respect to a substrate to be exposed, whereby the mask and the substrate are closely contacted to each other and whereby the substrate is exposed with near field light. More specifically, an elastically deformable exposure mask is supported at a sufficiently close distance to a substrate to be exposed and, in order to cause deformation of the mask, first the pressure in one of the spaces at opposite sides of the mask that faces a light source side is increased as

compared with the pressure in the space that faces the substrate to be exposed. As the pressure difference between the front and rear faces of the exposure mask gradually increases due to the pressure increase, the mask is deformed and a portion thereof swelling in a convexed shape toward the substrate to be exposed is brought into contact with the substrate. As the deformation grows, the area of engagement with the substrate increases. The pressure is increased until the mask is brought into contact the whole of a predetermined exposure region, and the exposure is carried out in a state in which the mask is in contact the whole exposure region.

Since the mask is deformed and is gradually brought into contact with the substrate to be exposed, as described above, it is necessary that, even if the substrate to be exposed has a surface irregularity, the mask could be deformed to follow it and the mask could be closely contacted to the whole of the exposure substrate. The mask should be elastically deformable to the extent that close contact of an order not greater than 100 nm, required for the near field exposure, can be accomplished. In the aforementioned U.S. patent, a mask having a base material made from a silicon nitride thin film of a thickness of 0.1 μm

to 100 μm is used.

In the near-field exposure method disclosed in the aforementioned U.S. patent, if the substrate to be exposed has a surface irregularity as described above, it is necessary that the mask is deformed to follow the surface irregularity and is brought into close contact with the whole of the substrate. Conventionally, however, it has not yet been made clear that what pressure difference should be applied to between the front and rear faces of the exposure mask as an appropriate pressure for obtaining close contact suitable for the near field exposure. Also, an appropriate mask thickness for obtaining close contact suitable to the near field exposure has not yet been made clear.

[DISCLOSURE OF THE INVENTION]

It is accordingly an object of the present invention to provide a near-field exposure method, a near-field exposure apparatus, a near-field exposure mask and/or a device manufacturing method, by which, for performing near field exposure while deforming an elastically deformable exposure mask in accordance with a substrate to be exposed, the mask can be controlled to follow the surface irregularity of the substrate to be

exposed such that close contact suited to the near field exposure can be attained.

The present invention can provide a near-field exposure method, a near-field exposure apparatus, a near-field exposure mask and a device manufacturing method, arranged to be described below.

Specifically, in accordance with an aspect of the present invention, there is provided a near-field exposure method wherein a pressure difference is applied to between a front face and a rear face of an elastically deformable exposure mask to cause deformation of the exposure mask in accordance with a substrate to be exposed and to cause the exposure mask surface to follow a surface irregularity state of the substrate so that these surfaces are closely contacted to each other, for exposure based on near field light, characterized in that: the pressure difference applied to between the front and rear faces of the exposure mask is set at a predetermined pressure difference corresponding to surface roughness of the substrate to be exposed.

In one preferred form of this aspect of the present invention, the predetermined pressure difference is set at a pressure difference larger than a minimum pressure P which is determined to

satisfy equation (1) below, in relation to maximum surface roughness w at a measurement length a of the substrate to be exposed:

5

$$P = P_m + E \frac{16hw(4h^2 + (7-\nu)w^2)}{3a^4(1-\nu)} \quad \dots (1)$$

10 wherein h is a thickness of a thin-film mask base material, E is a Young's modulus, ν is a Poisson's ratio, P_m is a pressure difference for roughly contacting a first substrate and a second substrate with each other.

15 The predetermined pressure difference may be set at a pressure difference larger than the minimum pressure P only when the surface roughness of the substrate to be exposed is greater than a reachable depth of the near field
20 light.

In accordance with another aspect of the present invention, there is provided a near-field exposure apparatus for performing an exposure on the basis of near field light, said
25 apparatus comprising means for holding a thin film mask, a pressure container capable of applying a pressure to apply a pressure difference to between

a front face and a rear face of the thin film mask, control means for controlling the pressure difference, a stage for holding a substrate to be exposed, and a light source, characterized in
5 that: said control means is operable to set the pressure difference at a predetermined pressure difference corresponding to surface roughness of the substrate to be exposed.

In one preferred form of this aspect of
10 the present invention, said control means is operable to set the predetermined pressure difference at a pressure difference larger than a minimum pressure P which is determined to satisfy equation (1) as recited above, in relation to
15 maximum surface roughness w at a measurement length a of the substrate to be exposed.

The predetermined pressure difference can be set at a pressure difference larger than the minimum pressure P only when the surface
20 roughness of the substrate to be exposed is greater than a reachable depth of the near field light.

The exposure apparatus may further comprise measuring means for measuring surface
25 roughness of the substrate to be exposed.

In accordance with a further aspect of the present invention, there is provided a near-

field exposure mask to be used in an exposure process based on near filed light while a pressure difference is applied to between a front face and a rear face of an elastically deformable exposure mask to cause deformation in accordance with a substrate to be exposed and to cause the mask to follow a surface irregularity state of the substrate so that these surfaces are closely contacted to each other, wherein the exposure mask comprises a transparent thin-film mask base material and a light blocking film formed thereon, characterized in that: the thin-film mask base material has a predetermined thickness determined on the basis of surface roughness of the substrate to be exposed and a pressure difference to be applied to between the front and rear faces of the mask during the exposure.

In one preferred form of this aspect of the present invention, the predetermined thickness is set at a thickness smaller than a maximum film thickness determined to satisfy equations (2a) and (2b) below:

$$w(a, h, \Delta P) = \frac{4h^2}{7-\nu} \frac{1}{[R(a, h, \Delta P)]^{1/3}} + \frac{[R(a, h, \Delta P)]^{1/3}}{3} \quad \dots (2a)$$

$$R(a, h, \Delta P) = \frac{1-\nu}{7-\nu} \frac{81a^4 \Delta P}{32hE} + \sqrt{1728h^6 + \left(\frac{1-\nu}{7-\nu} \frac{81a^4 \Delta P}{32hE} \right)^2} \quad \dots (2b)$$

wherein h is a thickness of a thin-film mask base material, E is a Young's modulus, ν is a Poisson's ratio, ΔP is an applied pressure to be applied after the rough contact, and w is surface
5 roughness at a measurement length a .

The predetermined thickness may be set at a thickness which is smaller than a smallest value of maximum thicknesses determined in accordance with equations (2a) and (2b) mentioned
10 above with reference to those substrate portions, respectively, in which portions, among largest surface roughnesses at different measurement lengths with respect to the substrate to be exposed, the value of roughness is greater than a
15 reachable distance of the near field light.

In accordance with a yet further aspect of the present invention, there is provided a device manufacturing method, comprising: a preparing step for preparing a substrate for
20 device production; an applying step for applying a photosensitive resist for exposure, to the substrate to thereby provide a substrate to be exposed; an exposure wherein a pressure difference is applied to between a front face and a rear face
25 of an elastically deformable exposure mask to cause deformation of the exposure mask relative to the substrate to be exposed and to cause the

exposure mask surface to follow the surface
irregularity state of the substrate to be exposed,
so that these surfaces are closely contacted to
each other for exposure based on near field light,
5 and wherein the pressure difference to be applied
to between the front and rear faces of the
exposure mask for the exposure is set at a
predetermined pressure difference corresponding to
surface roughness of the substrate to be exposed;
10 a developing and etching step for performing
development and etching to the substrate having
been exposed; and a process step for performing a
predetermined process to the substrate in
accordance with a device to be produced, whereby a
15 device is produced.

In accordance with the present
invention, it is possible to provide a near-field
exposure method, a near-field exposure apparatus,
and a near-field exposure mask by which, when an
20 elastically deformable exposure mask is deformed
relative to a substrate to be exposed, for near
field exposure, the mask can follow the surface
irregularity of the substrate to be exposed so
that close contact of them suitable to the near
25 field exposure can be accomplished. Therefore, a
resist pattern can be formed very precisely and
with a good reproducibility.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

[BRIEF DESCRIPTION OF THE DRAWINGS]

Figure 1 is a schematic and diagrammatic view of a general structure of a near-field exposure apparatus, for explaining a first embodiment of the present invention.

Figure 2 is a graph for explaining the relation between mask displacement w_c and a disk diameter a where an applied pressure is taken as a parameter in the first embodiment of the present invention.

Figure 3 is a schematic view of a general structure of a near-field exposure apparatus, for explaining a second embodiment of the present invention.

Figure 4 is a graph for explaining the relation between mask displacement w_c and a disk diameter a where a film thickness is taken as a parameter in a third embodiment of the present invention.

[BEST MODE FOR CARRYING OUT THE INVENTION]

Preferred embodiments of the present invention will now be described with reference to the attached drawings. Specifically, description
5 will be made on first, second and third embodiments of the present invention, wherein, for causing an exposure mask to follow the surface irregularity of a substrate to be exposed to thereby obtain close contact of them suited to the
10 near field exposure, the pressure difference to be applied to between the front and rear faces of the mask is set at a pressure difference corresponding to the surface roughness of the substrate to be exposed in the first and second embodiment, while
15 an appropriate mask thickness is set for obtaining close contact suited to the near field exposure in the third embodiment.

[First Embodiment]

20 Figure 1 illustrates the structure of a near-field exposure apparatus, for explaining a first embodiment of the present invention.

In Figure 1, denoted at 109 is a light source for exposure, and denoted at 104 is a thin
25 film mask which is elastically deformable. Denoted at 107 is a substrate to be exposed, that is, a silicon wafer having a resist 114 applied

thereto.

The thin film mask 104 comprises a base material 101 made from a transparent thin film such as silicon nitride, for example. A metal
5 thin film 102 (light blocking film) is formed on the base material, while being patterned. There is a support member 103 at the peripheral portion of the thin-film base material 101.

In order to produce a pressure
10 difference between the upper and lower faces of the thin-film mask 104, there is a pressure container 105 which is pressure applicable and is closed by a transparent light introducing window 106 and the thin-film mask 104. The pressure
15 inside the container 105 is controlled by a pressure controller 110, and a valve 12 is provided to close it..

The substrate 107 to be exposed is fixed on a flat wafer holder 108 by attraction,
20 and this wafer holder 108 is fixed on an x-y stage 113. Denoted at 111 is a surface roughness measuring system for measuring surface roughness of the substrate to be exposed. It is operable to measure surface roughness at predetermined
25 measurement length.

Next, the sequential procedure of analysis for obtaining a predetermined pressure

difference corresponding to the surface roughness of the substrate to be exposed, in accordance with this embodiment, will be explained.

First, the stage 108 is moved to place
5 and stop the wafer at a predetermined position.

Subsequently, by using the pressure controller 110, a positive pressure P_m is applied into the pressure container, to swell the mask to case it to approximate to the wafer. Here, a
10 state in which the value of largest surface roughness at a measurement length a for the surface roughness is w , is considered.

The mask being deformed by the pressure P_m is lying on a recessed concave portion of the
15 substrate (having a depth w), such that, while the mask is locally in contact with minute convex portions of the substrate, it is not in contact with the whole surface.

Here, such state is defined as rough
20 contact. As a model simplifying such rough contact, a model in which a circular region having a diameter a is supported at an outer circumference and is planar while on the other hand the substrate to be exposed has a central
25 portion being concaved from the plane mask surface with a depth w , is used and analysis is done.

From this state, a pressure ΔP is

applied to the region of the mask, having a diameter a. If the central portion of the disk having a diameter a displaces by about w in response to the pressure application, it can be considered that the mask surface has a shape generally following the wafer surface.

Thus, if the pressure ΔP that causes such displacement can be identified, such value ΔP itself or a product obtained by multiplying it by a certain safety factor C_0 (e.g., 1.5) taking into account the deformation in random shape, may be added to the rough contact pressure P_m and the resultant may be taken as an applied pressure during the exposure.

In this embodiment, the pressure difference ΔP applying a displacement w such as described above was calculated as follows. First, the deformation shape $u(r)$ of the thin film was examined in accordance with a finite element method, and it was confirmed that the shape according to equation (3) below has a good approximation to it. Here, r is the distance from the center of the disk.

$$u(r) = w \frac{a^2 - 4r^2}{a^2} \quad \dots(3)$$

A bending distortion energy V corresponding to this shape can be expressed by equation (4) below.

$$V = \frac{16\pi D (1+\nu) w^2}{a^2} \quad \dots(4)$$

Here, D is the flexural rigidity of the thin film, and it can be defined by equation (5) below.

$$D = \frac{E h^3}{12 (1-\nu^2)} \quad \dots(5)$$

15

Also, as regards the distortion energy V_1 due to elongation of the central surface, a calculus of variation was applied and equation (6) below was obtained.

$$V_1 = \frac{2\pi D (7+6\nu-\nu^2) w^4}{a^2 h^2} \quad \dots(6)$$

25

In this manner, by applying the principle of virtual displacement to the

distortion energy as represented by $V+V_1$, an equation regarding the flexure is obtainable.

Solving this, equation (7a) below was obtained.

In this equation, h is the thickness of the thin-film mask base material, E is the Young's modulus, ν is the Poisson's ratio. Alternatively, equation (7b) additionally including a safety factor C_0 may be used.

10

$$\Delta P = E \frac{16hw(4h^2 + (7-\nu)w^2)}{3a^4(1-\nu)} \quad \dots (7a)$$

$$\Delta P = C_0 E \frac{16hw(4h^2 + (7-\nu)w^2)}{3a^4(1-\nu)} \quad \dots (7b)$$

15

The pressure P_m for approximating the mask and the wafer to each other also depends on the thickness of the base material and the material constant and, furthermore, it depends on the mask-to-wafer distance before the pressure application. While this quantity can be derived by calculation, the approximating action of the mask and the wafer may be monitored and, in that occasion, the quantity can be acquired at once. The pressure difference ΔP obtained from equation (3) is added to pressure P_m having been determined

20

25

in accordance with any one of the above-described methods, and the result is taken as a lower-limit set value P_{low} for the pressure to be applied to the mask. By applying a pressure not lower than
5 the lower-limit set value P_{low} , the distance between the mask and the wafer can be reduced and good close-contact state can be accomplished.

Here, the largest surface roughness corresponds to the difference between a maximum
10 point of displacement and a minimum point of displacement from a reference line within a measurement length. This is a quantity which depends on the measurement length, and also it is a statistical value which varies with wafers.

15 On the other hand, the displacement amount w of the mask due to the pressure application is also a quantity that depends on the diameter of the disk considered here, that is, the measurement length for roughness. Since each of
20 these quantities comprises a set of a plurality of quantities, comparison using a graph such as shown in Figure 2 and to be described below may effectively be made to choose ΔP .

First, equation (7) is solved with
25 respect to w , and equations (8a) and (8b) are obtained. Equation (8b) is used to $R(a, h, P)$ in equation (8a). By using this, as shown in Figure

2, the displacement amount w at the mask center is plotted with reference to the diameter a of the model disk. Figure 2 illustrates a calculation example with respect to a silicon nitride film of a thickness 0.5 nm.

$$w_c(a, h, P) = \frac{4h^2}{7-\nu} \frac{1}{[R(a, h, P)]^{1/3}} + \frac{[R(a, h, P)]^{1/3}}{3} \quad \dots (8a)$$

$$R(a, h, P) = \frac{1-\nu}{7-\nu} \frac{81a^4 P}{32 h E} + \sqrt{1728h^6 + \left(\frac{1-\nu}{7-\nu} \frac{81a^4 P}{32 h E} \right)^2} \quad \dots (8b)$$

From the foregoing description, it is seen that, if the largest roughness $w+3s$ (s is the standard deviation of the roughness) at respective measurement lengths under an applied pressure ΔP is smaller than $w_c(a, h, \Delta P)$, the mask and the wafer can follow each other.

Further, where values of surface roughness obtained with different measurement lengths are plotted in the same figure and, if all of them are included in a meshed region, then it is seen that the mask and the wafer can be brought into good contact with each other.

Although the near field light depends

on the pattern of opening, since it can reach up to a region of tens nanometers, near field exposure can be carried out to a surface irregularity not larger than 10 nm, for example, without a substantial influence. In consideration of this, the surface roughness measurement length a is made shorter and shorter and, if there is a length with which the largest surface roughness becomes not greater than 10 nm, then the surface roughness in a region narrower than that length can be disregarded since it does not substantially and adversely affect the near field exposure.

In this embodiment, the pressure controller 110 is controlled to apply a pressure difference, determined in the manner described above, to between the front and rear faces of the thin-film mask. Then, the valve 112 is closed to hold the pressure. Light from the light source 109 is then projected onto the thin-film mask 104 through the introducing window 106, whereby the resist film on the wafer 107 is exposed.

In accordance with this embodiment wherein a pressure difference such as described above is applied and near field exposure is carried out on the basis of it, the mask can be deformed to follow the wafer in accordance with a pressure corresponding to the surface roughness of

the wafer. As a result, a resist pattern can be produced with a good precision. Further, since it is no more necessity to apply an unnecessarily large pressure difference to the mask, unnecessary deformation of the mask can be avoided and distortion of a pattern to be transferred can be reduced. Thus, high pattern reproducibility can be attained.

Furthermore, in addition to the exposure process described in this embodiment, a developing and etching process may be done to the exposed substrate and, thereafter, a predetermined process or processes corresponding to devices to be produced on a silicon wafer, for example, may be performed, whereby devices such as semiconductor devices, optical devices, or quantum devices, for example, can be manufactured.

[Second Embodiment]

Figure 3 shows the structure of an exposure apparatus according to a second embodiment of the present invention.

In Figure 3, denoted at 211 is a light source for exposure, and denoted at 204 is a thin film mask which is elastically deformable. Denoted at 209 is a substrate to be exposed, that is, a silicon wafer having a resist applied

thereto.

The thin film mask 204 comprises a base material 201 made from a transparent thin film such as silicon nitride, for example. A metal
5 thin film 202 (light blocking film) is formed on the base material, while being patterned. There is a support member 203 at the peripheral portion of the thin-film base material 201.

In order to produce a pressure
10 difference between the upper and lower faces of the thin-film mask 204, the thin-film mask 204 and a pressure container 205 as well as a container cover 206 are assembled by use of O-rings 207 and 208. Inside of the container is a closed space
15 which is pressure applicable, and the inside pressure of the container is controlled by a pressure controller 212, and a valve 213 is provided to close it.

The substrate 209 to be exposed is
20 fixed, by attraction, on a flat wafer holder 108 which is mounted on an x-y stage 210. The stage 210 is moved to place and stop the wafer at a predetermined position. Then, by using the pressure controller 212, the inside pressure of
25 the pressure container is reduced to swell the thin-film mask 204 to case it to approximate to the wafer.

By controlling the pressure controller 212, a pressure difference corresponding to the surface roughness of the mask is applied to between the front and rear faces of the mask, in a similar manner as the first embodiment, and then the valve 213 is closed to hold the pressure. In this state, light from the light source 211 is projected onto the thin-film mask 204, whereby the resist film on the wafer 209 is exposed.

10 In accordance with this embodiment wherein a pressure difference such as described above is applied and near field exposure is carried out on the basis of it, the mask can be deformed to follow the wafer in accordance with a pressure corresponding to the surface roughness of the wafer. As a result, a resist pattern can be produced with a good precision. Further, since it is no more necessity to apply an unnecessarily large pressure difference to the mask, unnecessary deformation of the mask can be avoided and distortion of a pattern to be transferred can be reduced. Thus, high pattern reproducibility can be attained.

25 [Third Embodiment]

In accordance with a third embodiment of the present invention, the thickness of a near-

field mask is set at a thickness appropriate for obtaining close contact suited to the near field exposure, on the basis of the surface roughness of the substrate to be exposed and of the pressure difference to be applied to between the front and rear faces of the mask during the exposure.

Once the surface roughness of the substrate to be exposed, to be used for near field exposure as well as the pressure ΔP to be applied for the close contact after the rough contact are determined, the film thickness of the thin-film mask base material corresponding to them can be designed, in the manner to be described below.

Figure 4 illustrates the relationship between the mask displacement amount w_c and the diameter a of the model disk, wherein the mask displacement amount w_c is plotted with reference to the disk diameter a . The parameter in this example is the film thickness of the thin-film mask base material. The pressure was 10 kPa. Figure 4 is an example of calculation to a silicon nitride film, using equations (8a) and (8b) described with reference to the first embodiment.

If the largest roughnesses $w+3s$ (s is the standard deviation of the roughness) at respective measurement lengths are smaller than w_c ($a, h, \Delta P$), the mask and the wafer can follow each

other. The values of roughness corresponding to various measurement lengths are plotted in Figure 4, and a curve that passes above all the plotted points is chosen. It is seen that, by using such
5 film thickness, the mask and the wafer can follow each other in response to the application of a predetermined pressure ΔP . Namely, among aggregations of largest surface roughnesses each being determined in relation to a few measurement
10 lengths, equations may be referred to with respect to one or those aggregations having a value larger than the reachable length of the near field light, and a smallest value in the aggregation of the largest film thickness is chosen. Then, a film
15 thickness smaller than the so selected value, may be designed.

Alternatively, if it is predetected that the surface roughness increases, as compared with the initial state, in the latter half of a
20 process involving plural times of exposure operations, for example, Figure 4 which is a plot view based on equations (8a) and (8b) may be referred to and the mask thickness to be used in the first half of the process and the mask
25 thickness to be used in the second half of the process may be made different from each other.

[INDUSTRIAL APPLICABILITY]

According to the present invention, it is possible to provide a near-field exposure method, a near-field exposure apparatus, a near-field exposure mask and/or a device manufacturing method, by which, for performing near field exposure while deforming an elastically deformable exposure mask in accordance with a substrate to be exposed, the mask can be controlled to follow the surface irregularity of the substrate to be exposed such that close contact suited to the near field exposure can be attained.

While the invention has been described with reference to the structures disclosed herein, it is not confined to the details set forth and this application is intended to cover such modifications or changes as may come within the purposes of the improvements or the scope of the following claims.

CLAIMS

1. A near-field exposure method wherein a
5 pressure difference is applied to between a front
face and a rear face of an elastically deformable
exposure mask to cause deformation of the exposure
mask in accordance with a substrate to be exposed
and to cause the exposure mask surface to follow a
10 surface irregularity state of the substrate so
that these surfaces are closely contacted to each
other, for exposure based on near field light,
characterized in that:

the pressure difference applied to
15 between the front and rear faces of the exposure
mask is set at a predetermined pressure difference
corresponding to surface roughness of the
substrate to be exposed.

20 2. A method according to Claim 1, wherein
the predetermined pressure difference is set at a
pressure difference larger than a minimum pressure
P which is determined to satisfy equation (1)
below, in relation to maximum surface roughness w
25 at a measurement length a of the substrate to be
exposed:

$$P = P_m + E \frac{16hw(4h^2 + (7-\nu)w^2)}{3a^4(1-\nu)}$$

... (1)

5

wherein h is a thickness of a thin-film mask base material, E is a Young's modulus, ν is a Poisson's ratio, P_m is a pressure difference for roughly contacting a first substrate and a second
10 substrate with each other.

3. A method according to Claim 2, wherein the predetermined pressure difference is set at a pressure difference larger than the minimum
15 pressure P only when the surface roughness of the substrate to be exposed is greater than a reachable depth of the near field light.

4. A near-field exposure apparatus for
20 performing an exposure on the basis of near field light, said apparatus comprising means for holding a thin film mask, a pressure container capable of applying a pressure to apply a pressure difference to between a front face and a rear face of the
25 thin film mask, control means for controlling the pressure difference, a stage for holding a substrate to be exposed, and a light source,

characterized in that:

said control means is operable to set the pressure difference at a predetermined pressure difference corresponding to surface
5 roughness of the substrate to be exposed.

5. An apparatus according to Claim 4, wherein said control means is operable to set the predetermined pressure difference at a pressure
10 difference larger than a minimum pressure P which is determined to satisfy equation (1) as recited in Claim 2, in relation to maximum surface roughness w at a measurement length a of the substrate to be exposed.

15

6. An apparatus according to Claim 5, wherein the predetermined pressure difference can be set at a pressure difference larger than the minimum pressure P only when the surface roughness
20 of the substrate to be exposed is greater than a reachable depth of the near field light.

7. An apparatus according to any one of Claims 4 - 6, further comprising measuring means
25 for measuring surface roughness of the substrate to be exposed.

8. A near-field exposure mask to be used
in an exposure process based on near field light
while a pressure difference is applied to between
a front face and a rear face of an elastically
5 deformable exposure mask to cause deformation in
accordance with a substrate to be exposed and to
cause the mask to follow a surface irregularity
state of the substrate so that these surfaces are
closely contacted to each other, wherein the
10 exposure mask comprises a transparent thin-film
mask base material and a light blocking film
formed thereon, characterized in that:

the thin-film mask base material has a
predetermined thickness determined on the basis of
15 surface roughness of the substrate to be exposed
and a pressure difference to be applied to between
the front and rear faces of the mask during the
exposure.

20 9. A near-field exposure mask according to
Claim 8, wherein the predetermined thickness is
set at a thickness smaller than a maximum film
thickness determined to satisfy equations (2a)
and(2b) below:

25

$$w(a, h, \Delta P) = \frac{4h^2}{7-\nu} \frac{1}{[R(a, h, \Delta P)]^{1/3}} + \frac{[R(a, h, \Delta P)]^{1/3}}{3} \quad \dots (2a)$$

$$R(a, h, \Delta P) = \frac{1-\nu}{7-\nu} \frac{81a^4 \Delta P}{32hE} + \sqrt{1728h^6 + \left(\frac{1-\nu}{7-\nu} \frac{81a^4 \Delta P}{32hE} \right)^2} \quad \dots (2b)$$

wherein h is a thickness of a thin-film mask base material, E is a Young's modulus, ν is a Poisson's ratio, ΔP is an applied pressure to be applied after the rough contact, and w is surface roughness at a measurement length a .

10. A near-field exposure mask according to Claim 9, wherein the predetermined thickness is set at a thickness which is smaller than a smallest value of maximum thicknesses determined in accordance with equations (2a) and (2b) mentioned above with reference to those substrate portions, respectively, in which portions, among largest surface roughnesses at different measurement lengths with respect to the substrate to be exposed, the value of roughness is greater than a reachable distance of the near field light.

25

11. A device manufacturing method, comprising:

a preparing step for preparing a substrate for device production;

an applying step for applying a photosensitive resist for exposure, to the
5 substrate to thereby provide a substrate to be exposed;

an exposure wherein a pressure difference is applied to between a front face and a rear face of an elastically deformable exposure
10 mask to cause deformation of the exposure mask relative to the substrate to be exposed and to cause the exposure mask surface to follow the surface irregularity state of the substrate to be exposed, so that these surfaces are closely
15 contacted to each other for exposure based on near field light, and wherein the pressure difference to be applied to between the front and rear faces of the exposure mask for the exposure is set at a predetermined pressure difference corresponding to
20 surface roughness of the substrate to be exposed;

a developing and etching step for performing development and etching to the substrate having been exposed; and

a process step for performing a
25 predetermined process to the substrate in accordance with a device to be produced, whereby a device is produced.

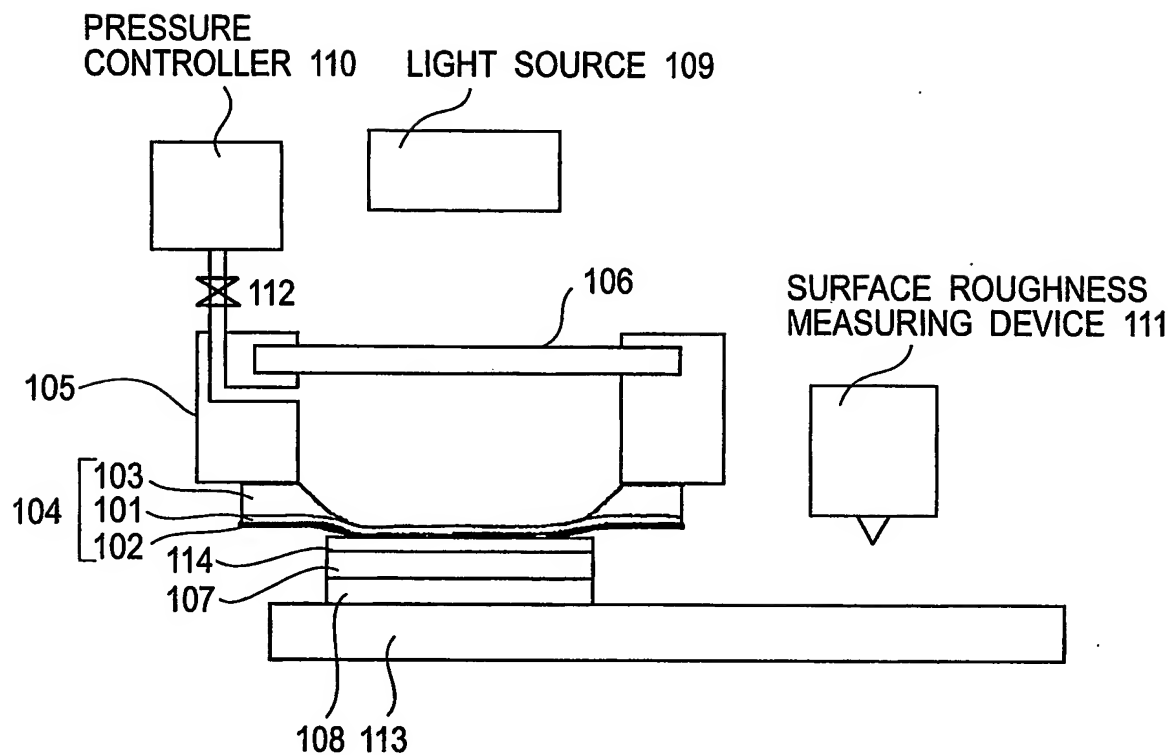
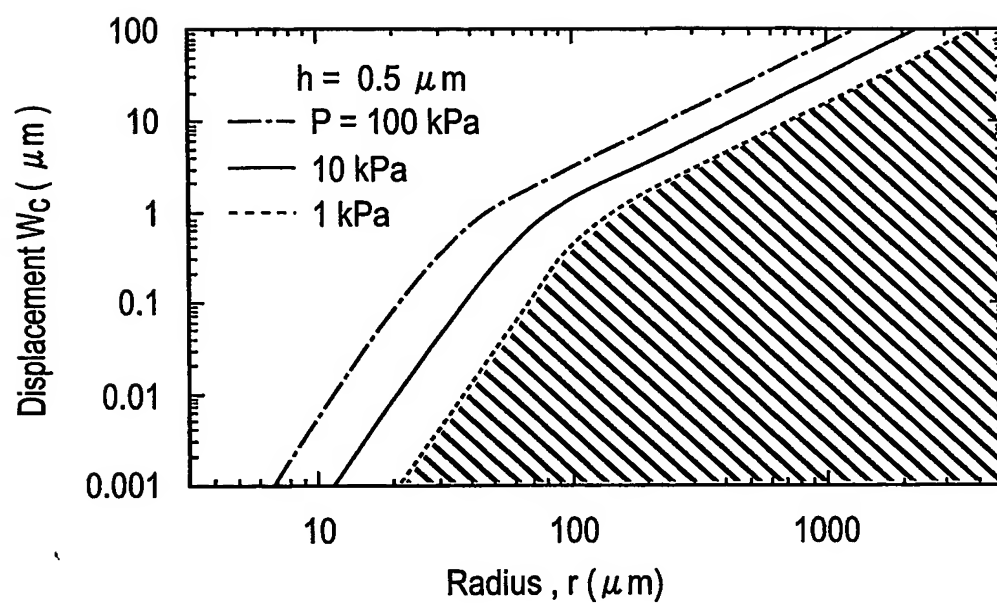
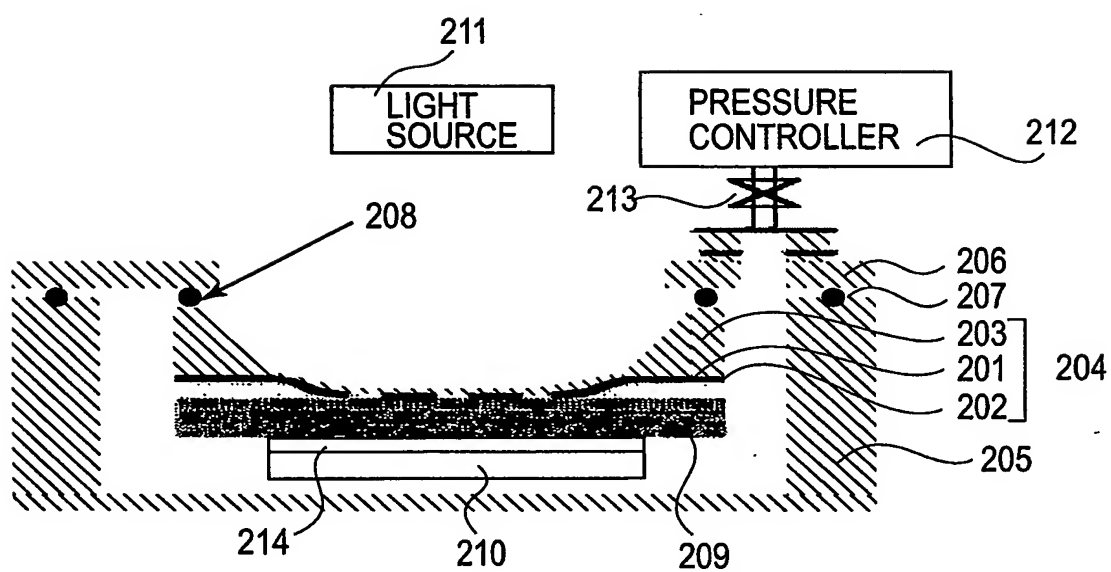
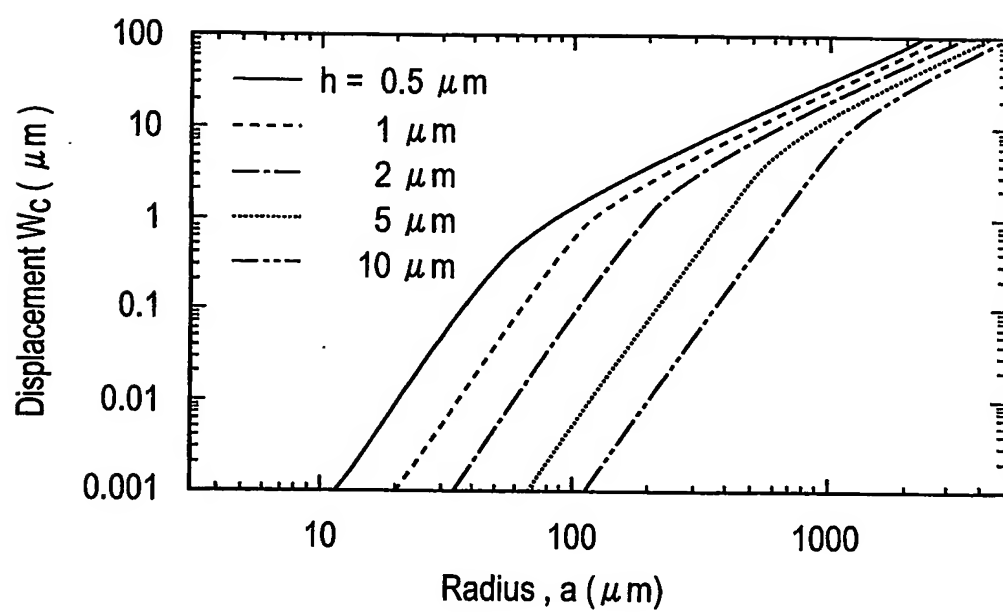


FIG. 1

**FIG.2**

**FIG.3**

**FIG.4**